


Next-generation sync test: Interface rates to 800GbE

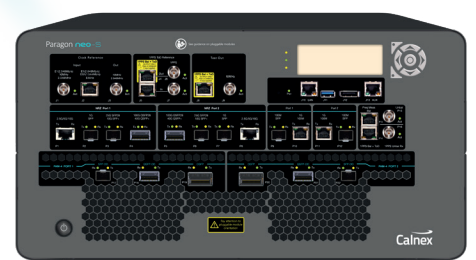

Supporting your changing environment

Driven by ever increasing 5G data demands and the performance requirements for AI workloads, the adoption of high-speed Ethernet continues to surge. As does the challenge of verifying packet synchronization for network equipment.

Building on the pedigree of the Calnex Paragon family, Paragon neo-S is the new, cutting-edge test solution for synchronization testing up to 800G. It's designed for the stringent test requirements of enhanced 5G and O-RAN timing standards as well as the developing requirements driving operational efficiencies in data centers.

What's more, because high network efficiency and reduced data transmission costs are only possible with highly accurate timing, Paragon neo-S offers hardware performance and software test

methodologies allowing *sub-nanosecond accuracy* for the entire test system.


Paragon neo-S also offers unequalled compatibility. With step changes in physical layer technology needed for 800GbE, a new generation of pluggable optical transceivers are being created. Paragon neo-S not only meets the challenge of synchronization testing at 800G, but with the next generation of transceivers too.

Calnex is committed to providing the most advanced, precise and reliable test solutions to make sure your devices and systems deliver the high-quality network services of the future. In a changing world, it's good to know that some things never change.

Analyse PTP conformance to standards-based or user-defined profiles, with automatic indication of pass/fail (and reason for non-compliance) and report generation.

Generate SyncE wander for ITU-T G.8262.1/G.8262 testing, simultaneously measure SyncE wander and PTP Time Error, and control ESMC message generation for testing to ITU-T G.8264.

Emulate PTP clocks to maximise accuracy and repeatability of PTP test, including specific test modes for various DUTs and automatic test selection for ITU-T and O-RAN standards conformance.

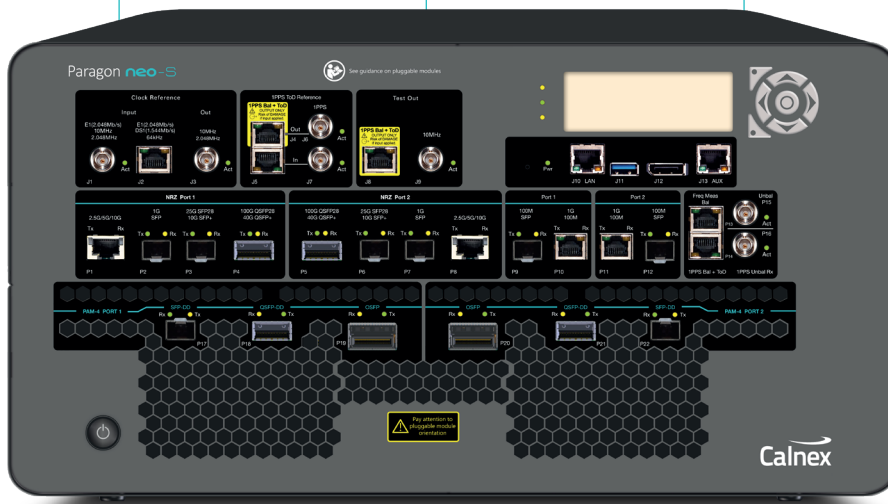

PTP Field Verifier (PFV)

- Analyze PTP protocol for conformance to standards or user-defined profiles.
- Automatic pass/fail indication – check captured PTP messages against a pre-defined set of rules, with clear pass/fail alerts.

Conformance Test Application

- Start testing in seconds – just two clicks to configure crucial standards-defined test sequences.
- Automatically generates PTP and ESMC messages, Time Error and SyncE impairments, and applies filters, metrics and masks.

Direction	Packet #	Arrival Time	Inter Message Time (s)	Message Type	Sequence#	LogMessage#	PTP Body Fields
	478	9.181811448000	2.0	0.06250044750	DEL_RESP	1979	4
	478	9.25009782500	2.0	0.12489897250	ANNOUNCE	690	-3
	480	9.25009847500	2.0	0.06250044750	DEL_RESP	1330	127
	481	9.250111385000	2.0	0.06249994250	DEL_RESP	1330	-4
	482	9.31208892500	2.0	0.06250044750	DEL_RESP	1331	127
	483	9.312081435000	2.0	0.06250044750	DEL_RESP	1331	-4
	484	9.375010915250	2.0	0.12505214000	ANNOUNCE	691	-3
	485	9.375010915250	2.0	0.06250044750	DEL_RESP	1332	127
	486	9.37511372500	2.0	0.06249994250	DEL_RESP	1332	-4
	487	9.437508705000	2.0	0.06250044750	DEL_RESP	1333	127
	488	9.437511415250	2.0	0.06250044750	DEL_RESP	1333	-4
	489	9.50009770000	2.0	0.12489897250	ANNOUNCE	692	-3
	489	9.50009847500	2.0	0.06250044750	DEL_RESP	1334	127
	491	9.50012173000	2.0	0.06250073500	DEL_RESP	1334	-4
	492	9.562499995000	2.0	0.06149999750	SYNC	1335	4
	493	9.562499997500	2.0	0.06249992500	DEL_RESP	1335	127
	494	9.562511693750	2.0	0.06249992500	DEL_RESP	1335	-4
	495	9.625000000000	2.0	0.06250044750	DEL_RESP	1336	4
	496	9.625000782500	2.0	0.12489897250	ANNOUNCE	693	-3
	497	9.625000995000	2.0	0.06249994250	DEL_RESP	1336	127
	498	9.625113470000	2.0	0.06249994250	DEL_RESP	1336	-4
	499	9.687500500000	2.0	0.06250044750	DEL_RESP	1337	127
	500	9.687511375000	2.0	0.06250044750	DEL_RESP	1337	-4
	501	9.750000735000	2.0	0.12489897250	ANNOUNCE	694	-3
	502	9.750000975000	2.0	0.06250044750	DEL_RESP	1338	127






- Analyze the Time Error (TE) of, for example, Class-C/D T-Boundary Clocks or Class-B PRTC/Master Clocks.
- Apply standards-defined Time Error impairments.
- Combine with SyncE and ESMC for complex tests such as Phase Noise Response to SyncE Transient.

Full suite of PTP and SyncE wander testing

Simultaneously test PTP Time Error/SyncE wander and measure output packet timing, recovered clocks and SyncE wander, with unbeatable test accuracy and repeatability across rates, even up to 800GbE.

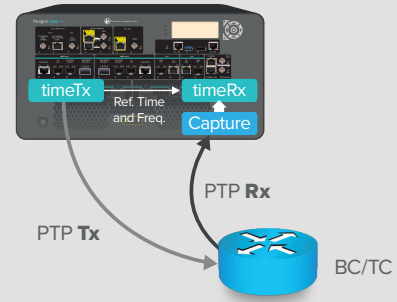

Application

- Boundary Clock Testing
- Transparent Clock Testing
- APTS Clock Testing
- PRTC Testing
- time Receiver Testing
- eEEC/EEC Testing

Standard


- ITU-T G.8273.2
- ITU-T G.8273.2
- ITU-T G.8273.4
- ITU-T G.8272
- ITU-T G.8273.2
- ITU-T G.8262.1/G.8262



The Calnex Analysis Tool (CAT) provides powerful insight into network and device performance. All your measurement results are now in one place, and you can view multiple graphs simultaneously for easier correlation of your results. Plus, with enhanced graphics, it's easy to evaluate metrics such as MTIE and TDEV against ITU-T and O-RAN masks.

SyncE Applications – ITU-T G.8262.1/G.8262 (Wander)

The Paragon neo-S supports full SyncE testing to ITU-T G.8262.1/G.8262 including Wander Tolerance, Wander Transfer, Wander (Noise) generation, Pull-in, Hold-in and Pull-out ranges, Frequency Accuracy and Phase Transient.

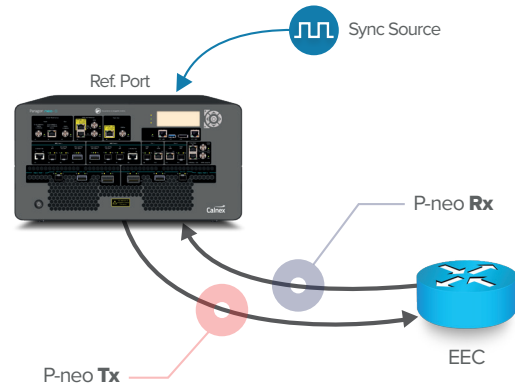

Application

- SyncE Wander (noise) Generation
- SyncE Wander (noise) Tolerance
- SyncE Wander (noise) Transfer
- SyncE Short Term Phase Transient

P-neo Tx

- Wander free
- Apply Wander
- Apply Wander
- Break line or set ESMC QL=DNU

P-neo Rx

- Measure Wander
- Check ESMC
- Measure Wander
- SyncE TIE, MTIE

PTP Performance Summary

- Capture and decode PTP packets for analysis and Time Error testing
- PTP clock emulation, plus the Paragon neo-S' unique conformance test application, removes uncertainty and maximizes test repeatability – essential for validating new, high-accuracy 5G network devices
- Automatic test of PTP profile compliance for simple and reliable verification against standards-based or user-defined profile configurations

SyncE Performance Summary

- Prove SyncE wander performance to ITU-T G.8262.1/G.8262
- Evaluate MTIE/TDEV pass/fail results to ITU-T G.8262.1/G.8262 masks
- Check ESMC (SSM) messaging to ITU-T G.8264

Specifications

Product	
Interfaces (all optional)	QSFP112-DD – 800G OSFP112 – 800G QSFP112 – 400G SFP112G - 100G Contact Calnex for roadmap of future interface support
External Reference Clocks	Lock internal timing reference to external reference. External reference inputs: 2.048 MHz, 10 MHz, T1 BITS clock (1.544 Mb/s), E1 MTS (2.048 Mb/s).
Internal Reference Clock	Frequency stability over temperature – better than $\pm 1 \times 10^{-9}$. Short term phase stability – better than 500 ps.
Clock Reference Output Port	10 MHz/2.048 MHz Reference Output (BNC).
Phase Measurement	1PPS – BNC (unbalanced). 1PPS – RJ (balanced).
Frequency measurement	BNC (unbalanced). RJ48 (balanced).
1 PPS + ToD Reference Input	1PPS Unbalanced Input (BNC), 1 pps Balanced Input + ToD (RJ48C). ToD format: CCSA, ITU-T, NMEA.
1 PPS + ToD Reference Output	1PPS Unbalanced Output (BNC), 1 pps Balanced Output + ToD (RJ48C). ToD format: CCSA, ITU-T, NMEA.
Mechanical Data	
Dimensions (w x h x d)	44.2 x 22.2 x 53.7 cm
Weight	20.5kg
General	
PC/Mac or Tablet Control Interface	Web-based GUI with built-in controller enables use of any PC or Android Tablet with any browser with screen resolution of 1024 x 768 pixels. RJ 45 LAN connection to instrument.
Workflow	Graphical test-case driven workflow with real-time status and results. Stimulus/Response test configuration tool. Detailed configuration options also available.
Remote Control	Scripting via TCL, Perl and Python. Automatic Script Recorder for TCL and Python. Compatible with Calnex Test Sequencer (CTS) for creation/use of specific or user-defined test plans.
PTP	
Standards	IEEE 1588 G.8273.2 including Class-C and Class-D devices. G.8272 including Class-B devices. All relevant G.826x/827x standards.
PTP Time Error Measurement Accuracy	Better than 5 ns for PAM4 optical interfaces.
timeTransmitter/timeReceiver Emulation	Emulate PTP timeTransmitter with full parametric control. Emulate PTP timeReceiver. Add Time Error patterns e.g. G.8273.2, G.8271.1, G.8271.2, G.8261, user-defined.
Time Error Metrics	Built-in (CAT) software including industry-standard ITU-T pass/fail masks with clear pass/fail indication. Time Error (2Way and 1Way) – packet selection and filtering as per ITU-T specifications cTE, dTE, etc.
PTP Packet Analysis	Decode and display PTP Fields with PFV. (Additional options with full PFV licence: Display pass/fail to standards-based or user-defined rules; report generation capability.)
SyncE	
Wander Measurement	ITU-T G.8262.1, G.8262 and O.174. Wander Generation, Wander Transfer, Wander Tolerance, Phase Transient, built-in frequency offset plus generation of sinusoidal, MTIE and TDEV Wander.
Wander Analysis	Built-in (CAT) software including industry-standard ITU-T pass/fail Masks with clear pass/fail indication. ITU-T Masks: G.8261, G.8262, G.8262.1, G.8261.1 Wander Measurements: TIE, MTIE, TDEV, clock FFO.
ESMC (SSM) Features	Decode ESMC messages to ITU-T G.8264 and graph/plot Quality Level (QL) changes graphically (bi-directional). Generate ESMC (SSM) packets as per ITU-T G.8264. Enhanced SSM fully supported.
Phase Wander Measurement Resolution	250ps

Specification is subject to change without notice.